

SubTiller II • SubTiller II • SubTiller II  
BLU-JET  
SubTiller II • SubTiller II • SubTiller II  
BLU-JET  
Your Partner for  
Conservation Farming

# **SUBTILLER II**™

## **ShearBolt Shank Mounting**



Optional StripTill mounting attaches to ShearBolt shanks



## **Rugged, Versatile Conservation Tillage Equipment**

- ▶ *Fracture Hardpan, Leave Surface Level*
- ▶ *Penetrate Soil to 14" (36 cm) -18" (46 cm) Depth*
- ▶ *Minimal Residue Disturbance*
- ▶ *Increase Root Growth & Penetration*
- ▶ *Maximize Moisture Absorption*
- ▶ *Improve Soil Structure and Tilth*
- ▶ *Five-Year Frame Warranty*

# SUBTILLER II™


## Fractures Hardpan, Leaves Surface Residue Intact

The **BLU-JET SubTiller II** lifts and fractures hardpan and wheel compaction caused by heavy equipment. The deep penetrating shanks, 14" (36 cm) to 18" (46 cm), fracture up to 20" (51 cm) on either side of the shank with minimal surface disturbance. Large 20" (51 cm) spring-cushion coulters easily cut through heavy residue. When crop residue is only slightly disturbed, erosion is controlled. This year-round conservation tillage tool helps you maximize moisture absorption, reduce runoff and keep the water available during the growing season. Engineered for maximum performance, the in-line shank design increases lifting and fracturing of compacted soil.

The **BLU-JET SubTiller II** is available in three models, ranging from 8 feet to 16 feet, (2.44 m to 4.88 m) with shear-bolt shanks and reversible wear shins. Models are available with three to seven shanks, three-point or pull-type. With today's emphasis on crop residue management, you need **BLU-JET SubTiller II** now.

- Framework of 4" x 6" x 1/2" (10 cm x 15.24 cm x 13 mm) heavy wall tubing

- In-line arrangement of SubTiller II shanks produce a continuous wave of fractured soil across the full width of the machine

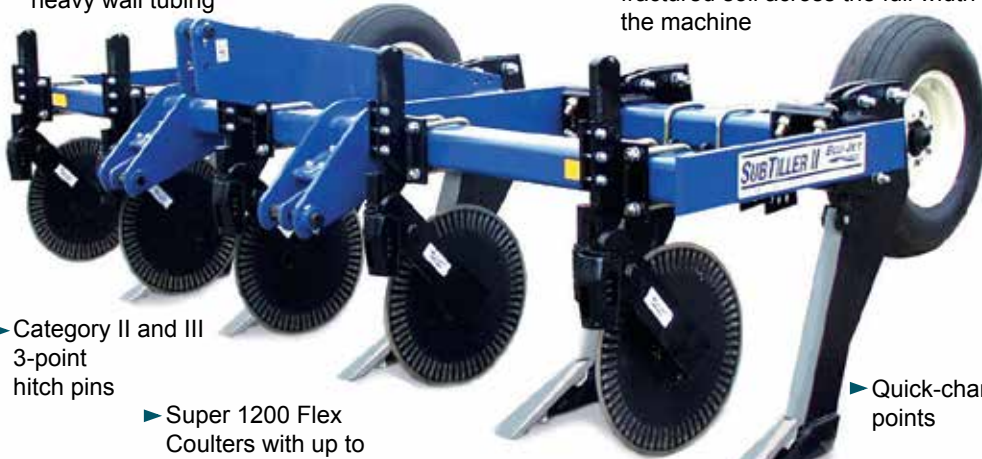

- Category II and III 3-point hitch pins

- Super 1200 Flex Coulters with up to 1200 psi. (8280 kPg) of residue slicing pressure

- Shank made of 1-1/4" x 6" (3.2 cm x 15.24 cm) high carbon steel

- Quick-change points

- Choice of Fall and SummerTill points

ShearBolt	ST 8	ST 11	ST 16
Pull Pin Kit	Cat. II and III	Cat. II and III	Cat. III
Shank	ShearBolt		
Coulters	Super 1200 Flex		
Blades	20" (51 cm) Fluted		
Manual Gauge	Pin-Adjust		
Wheels	CADI Fall • CADI Summer		
Points	CADI Fall • CADI Summer		
Transport Width	8' 2" (2.49 m)	11' 2" (3.4 m)	16' 2" (5 m)
Shank Material	1 1/4" x 6" (3.2 cm x 15.24 cm) High-carbon		
Shank Length	44" (1.12 m)		
Under-frame	32" (81 cm)		
Clearance			
Working Depths	14" to 18" (36 cm to 46 cm) w/Fall point • 10" to 18" (26 cm to 46 cm) w/Summer point		
Wear Shins	Reversible/replaceable		
Frames	4" x 6" x 1/2" (10 cm x 15.24 cm x 13 mm) thick tubular steel • Fully welded double-bar pull-through frame Accepts odd row configurations		
Weight (3 pt. Frames)	702 lbs. (318.4 kg)	1,020 lbs. (462.7 kg)	1,381 lbs. (626.4 kg)
Lighting Kit	Optional	Optional	Standard
Warranty	5 year on main frame, 1 year on components		
Pull Type Kits (Optional)	ST 8	ST 11	ST 16
Tongue (Optional)	Yes		
Drawbar Hitches	Fabricated clevis hitch • Cat. III Wheatland hitch • Cat. IV Wheatland hitch		
Hydraulic Gauge	Singles and Duals	Singles and Duals	Duals Only
Wheels			



Convert your **SubTiller II** from 3-point to pull-type with this 3-point tongue assembly.



**Optional Conservation Roller** attachment provides erosion control. It sets the surface residue, anchoring it into the soil behind your SubTiller II. Ratchet jacks provide easy depth control and ground pressure adjustment.



**Summer InterRow Rip**      **Fall Full Loosening**

**Reversible Shins and Quick Change CADI Points** provide high acreage and high wear.

## Also Ask About...



- **SubTiller 4**
- 3-point, Pull-type and Folding
- Breakup Soil Compaction

Distributed By:

**Find Out More... Call the BLU-JET Hotline (800-658-3127) Today**

**Thurston Manufacturing Company • 1708 H Ave • Box 218 • Thurston, Nebraska, 68062-0218**  
**Phone: 402-385-3041 • Fax: 402-385-3043 • E-mail: box218@thurstonmfgco.com**  
[www.thurstonmfgco.com](http://www.thurstonmfgco.com)